


FEATURES

- Large surround dome for increased acoustic output.
- Dual balanced compression chamber for improved dynamics.
- Copper cap for reduced voice coil inductance and minimum phase shift.
- Saturation controlled motor system for low distortion.
- Non-reflective rear chamber with optimized damping for improved dynamics.
- Flow optimized vented pole piece for optimum coupling to rear chamber.
- CCAW voice coil for low moving mass.
- Long life silver lead wires.
- Low resonance frequency.

Specs :

Nominal Impedance	4 Ω	Free air resonance, F_s	600 Hz
DC resistance, R_e	3.0 Ω	Sensitivity (2.83 V / 1 m)	93 dB
Voice coil inductance, L_e	0.05 mH	Mechanical Q-factor, Q_{ms}	1.95
Effective piston area, S_d	9.6 cm ²	Electrical Q-factor, Q_{es}	0.88
Voice coil diameter	29 mm	Total Q-factor, Q_{ts}	0.61
Voice coil height	2.0 mm	Force factor, Bl	2.4 Tm
Air gap height	2.5 mm	Rated power handling*	100 W
Linear coil travel (p-p)	0.5 mm	Magnetic flux density	1.1 T
Moving mass incl. air, M_{ms}	0.45 g	Magnet weight	0.22 kg
		Net weight	0.5 kg

* IEC 268-5, high-pass Butterworth, 2600 Hz, 12 dB/oct.

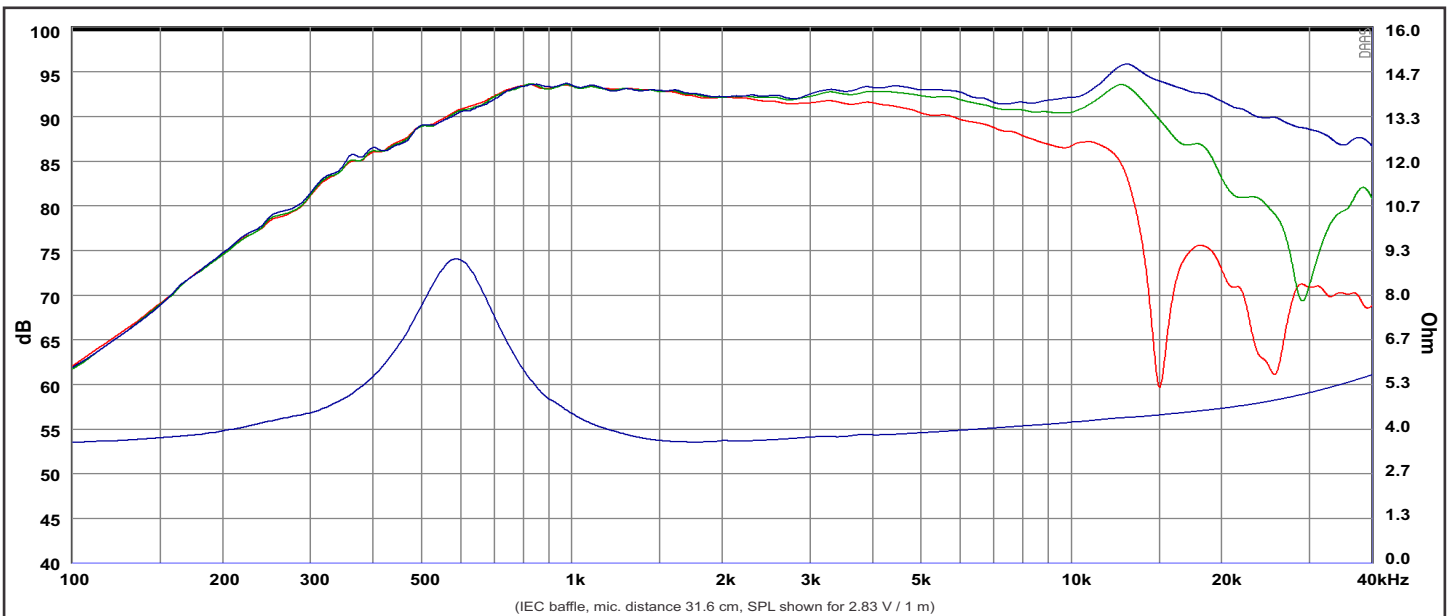

Response Curve :

— (Blue) : on axis - - - (Green) : 30° off-axis - · - · - (Red) : 60° off-axis