



## Swans-Speaker – TM1-A



### Specifications

<b>Midrange</b>	
<b>General Data</b>	
Nominal Power Handling (Pnom)(W)	60
Max Power Handling (Pmax)(W)	120
Sensitivity (2.83v/1m)(dB)	92
Weight (M)(Kg)	0.75
<b>Electrical Data</b>	
Nominal Impedance (Z)(Ω)	6
DC (Re)(Ω)	5.1
<b>Voice Coil and Magnet Parameters</b>	
VC Diameter (mm)	50
VC Length (H)(mm)	3
VC Former	CCAW
VC Frame	Aluminium
Magnet System	Outside
Magnet Former	Neodymium
<b>Tweeter</b>	
<b>General Data</b>	
Nominal Power Handling (Pnom)(W)	15
Max Power Handling (Pmax)(W)	30
Sensitivity (2.83v/1m)(dB)	90
Weight (M)(Kg)	0.0788
<b>Electrical Data</b>	
Nominal Impedance (Z)(Ω)	6
DC (Re)(Ω)	5.1
<b>Voice Coil and Magnet Parameters</b>	
VC Diameter (mm)	28
VC Length (H)(mm)	2
VC Former	CCAW
VC Frame	Aluminium
Magnet System	Shielded
Magnet Former	Neodymium

# Swans-Speaker – TM1-A

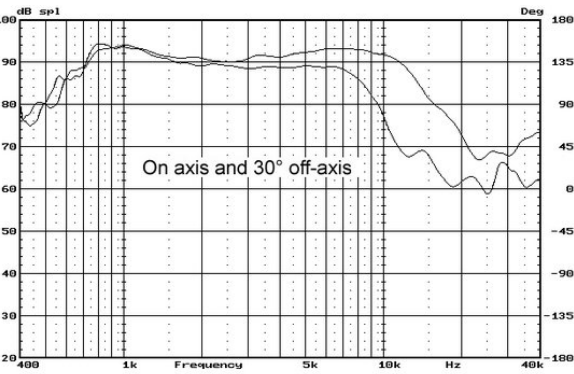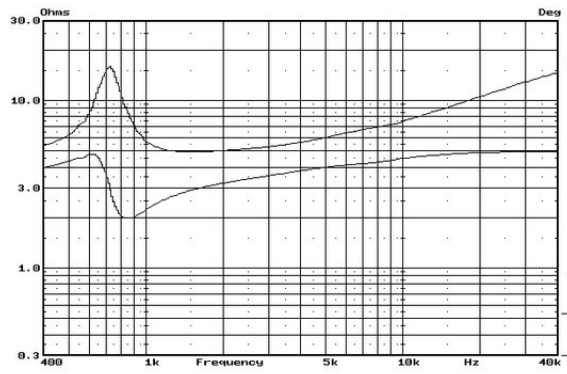

5

